


COMPACT – C1000N



TECHNICAL SPECIFICATIONS			
MAXIMUM SUSPENDING LOAD ($SL = P_R + P_{SLING} + P_{PLAT} + P_{LCU}$)		T max	1315 1250 kg
RATED LOAD (SUGGESTIVE)		PR max	1000 kg
PIT DEPTH		PD min	220 mm
HEADROOM		HD min	2200 mm
PLATFORM DIMENSIONS		WIDTH	A max 1400 mm
		DEPTH	B max 1300 mm
GUIDE TYPE		89 x 62 x 16	
SAFETY GEAR TYPE		INSTANTANEOUS	
PISTON TYPE	(depending on load and travel)	$\Phi 70 \times 5$ $\Phi 70 \times 8$	
PUMP TYPE		15	lt/min
OIL TANK		T50	
MOTOR TYPE	(230 volts 1PH)	2,5	KW
	(400 volts 3PH)	2,0	KW
CAR SPEED	V max	0,15	m/s
CAR TRAVEL	TR max	7.000 9.000	mm
NUMBER OF STOPS	max	4	
DOORS TYPE	SEMI-AUTOMATIC		

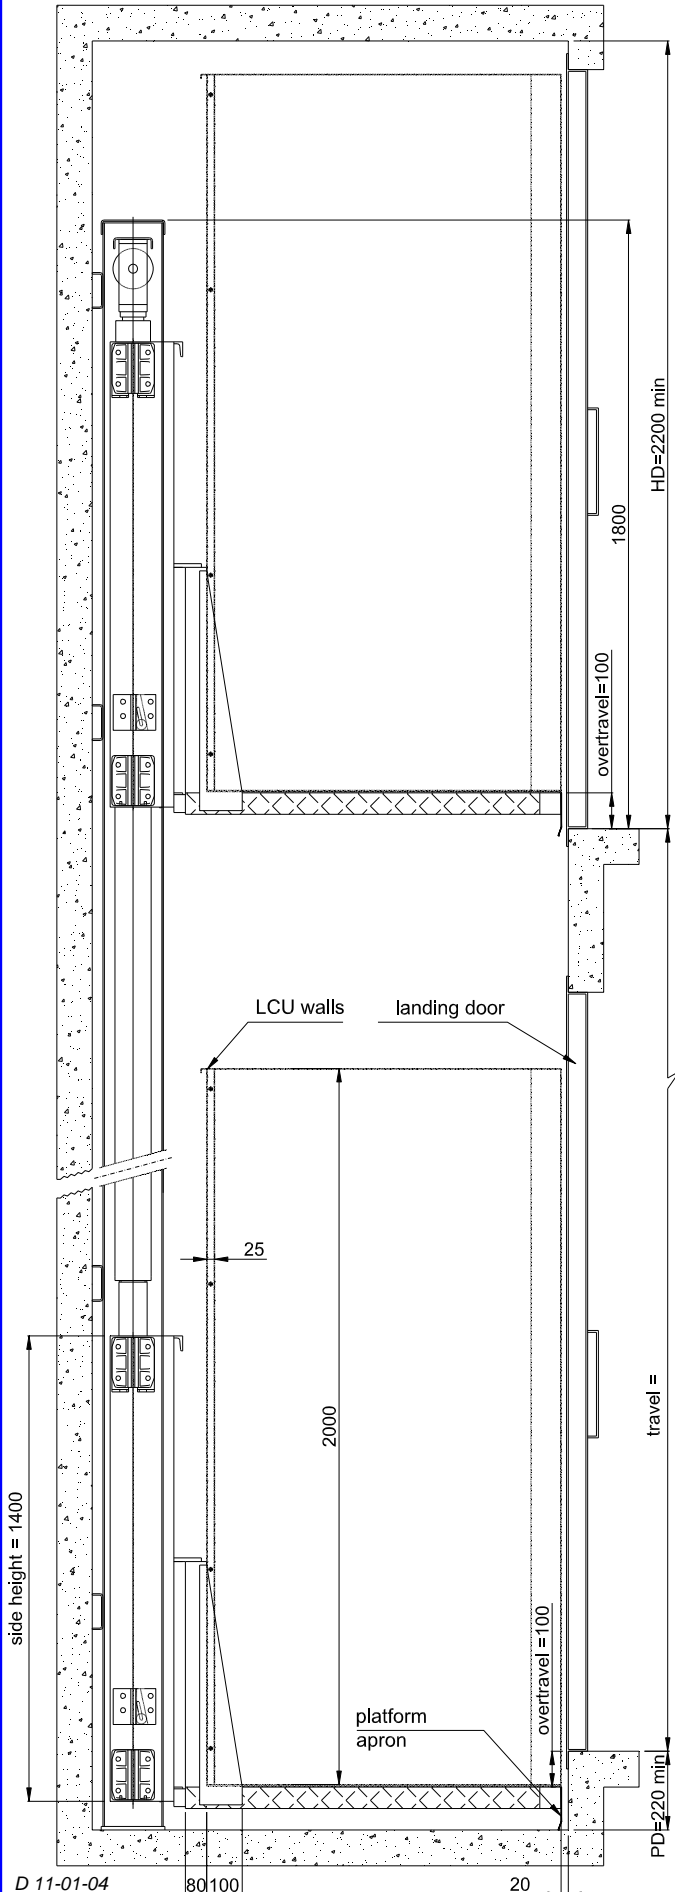