KLEEMANN

Your **1st** Choice **in Lifts**

COMPACT – CSG1000N

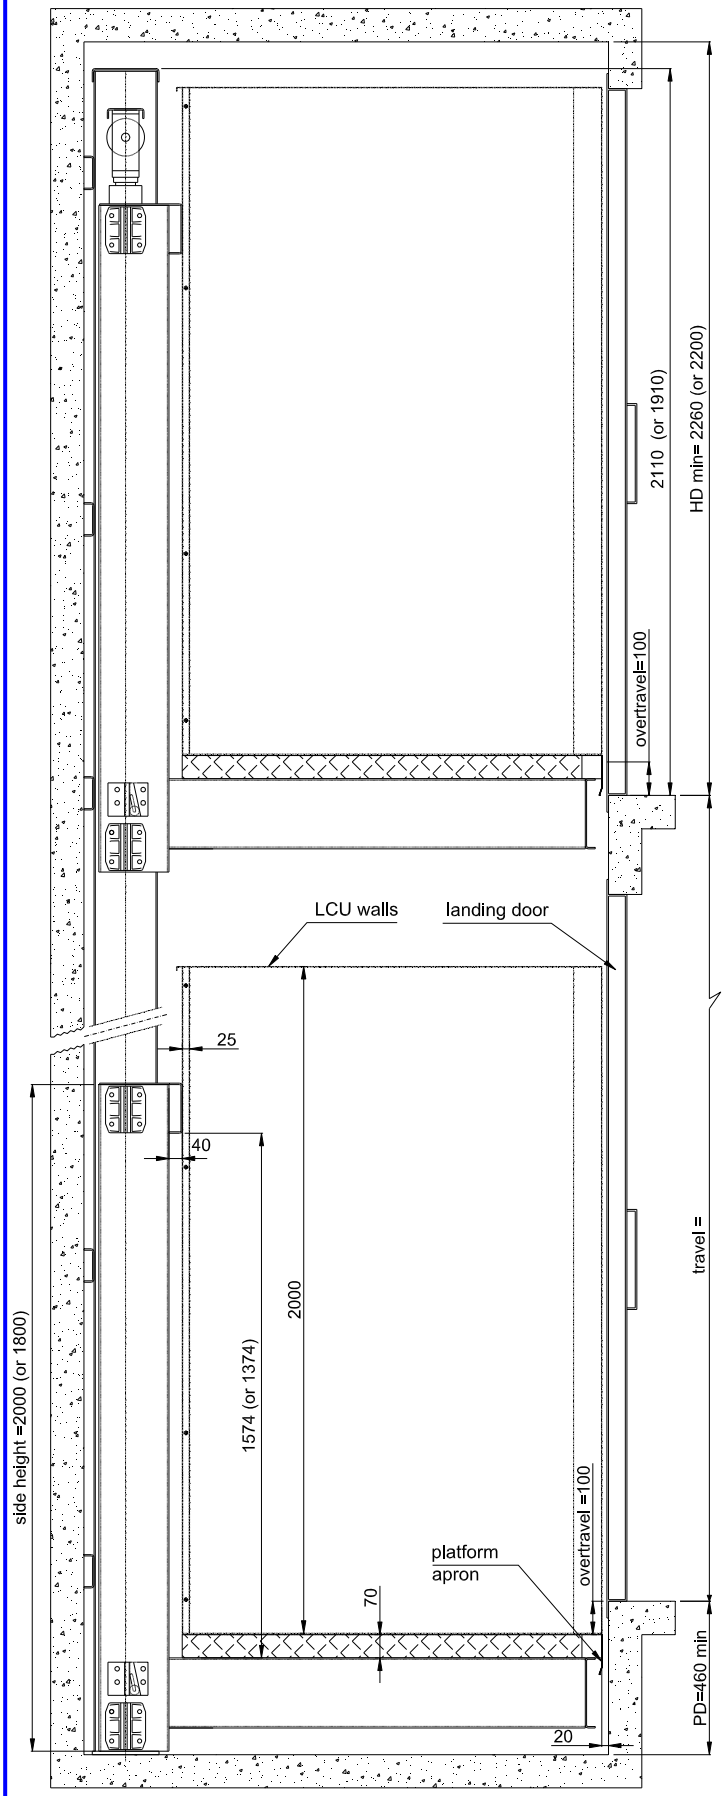

TECHNICAL SPECIFICATIONS

MAXIMUM SUSPENDING LOAD (SL = P_R + P_{SLING} + P_{PLAT} + P_{LCU})		**SL max**	**1315**	**1250**	kg
RATED LOAD (SUGGESTIVE)		**PR max**	**1000**		kg
PIT DEPTH		**PD min**	**460**		mm
HEADROOM		**HD min**	**See drawing**		mm
PLATFORM DIMENSIONS	**WIDTH**	**A max**	**1400**		mm
	DEPTH	**B max**	**1300**		mm
GUIDE TYPE			**89 x 62 x 16**		
SAFETY GEAR TYPE			**INSTANTANEOUS**		
PISTON TYPE	(depending on load and travel)		**Φ70x5**	**Φ70x8**	
PUMP TYPE			**15**		lt/min
OIL TANK			**T50**		
MOTOR TYPE	(230 volts 1PH)		**2,5**		KW
	(400 volts 3PH)		**2,0**		KW
CAR SPEED		**V max**	**0,15**		m/s
CAR TRAVEL		**TR max**	**7.000**	**9.000**	mm
NUMBER OF STOPS		**max**	**4**		
DOORS TYPE			**SEMIAUTOMATIC**		

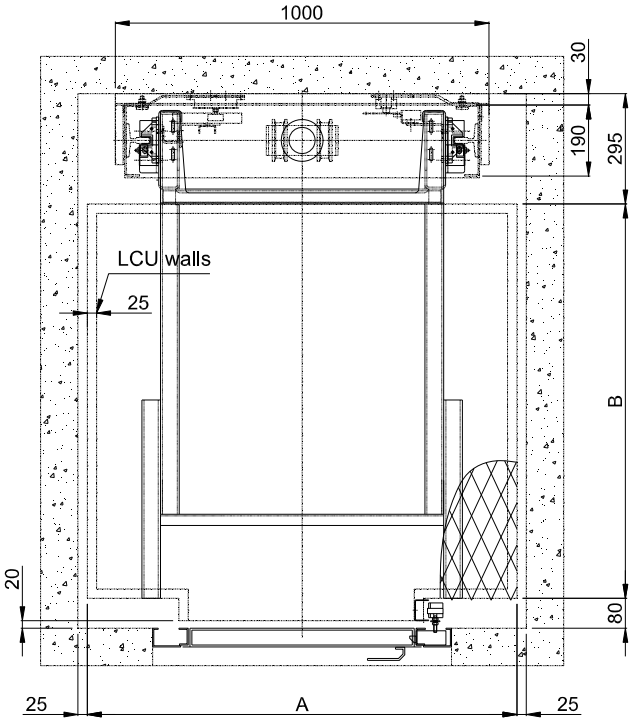

D 11-01-04

Version 2/2008

All dimensions in mm

For special cases contact KLEEMANN Exports Department