


TECHNICAL SPECIFICATIONS			
MAXIMUM SUSPENDING LOAD (SL = P _R + P _{SLING} + P _{PLAT} + P _{LCU})	SL max	465	kg
RATED LOAD (SUGGESTIVE)	PR max	300	kg
PIT DEPTH	PD min	430	mm
HEADROOM	HD min	See drawing	
PLATFORM DIMENSIONS	WIDTH	A max	1000 mm
	DEPTH	B max	1000 mm
GUIDE TYPE	70 x 70 x 9		
SAFETY GEAR TYPE	INSTANTANEOUS		
PISTON TYPE	(depending on load and travel)	Φ50 M	Φ60 M
PUMP TYPE	(depending on piston type)	8	13 lt/min
OIL TANK	T50		
MOTOR TYPE	(230 volts 1PH)	1,8	KW
	(400 volts 3PH)	2,0	KW
CAR SPEED	V max	0,15	m/s
CAR TRAVEL	TR max	9.000	11.500 mm
NUMBER OF STOPS	max	4	
DOORS TYPE	SEMI-AUTOMATIC		

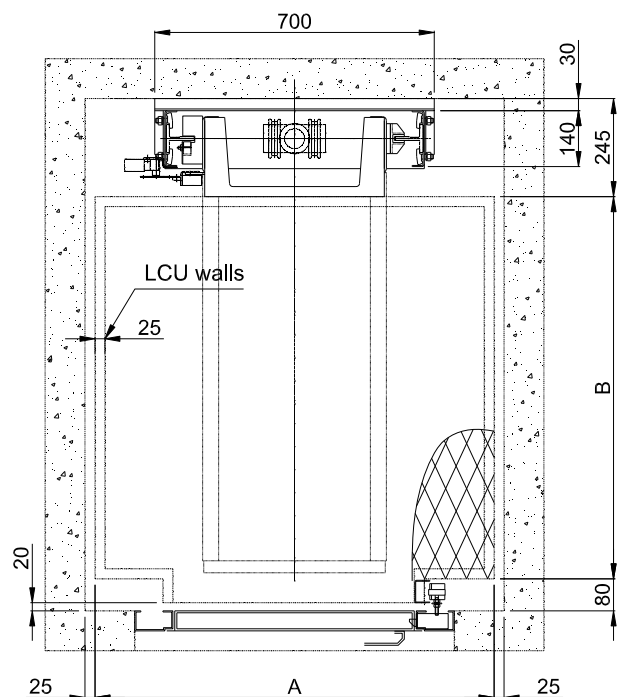

Version 2/2008